



TC PLUS User Reference Guide

External Security Administrator



TABLE OF CONTENTS

Introduction	2
Logging in to TC PLUS.....	2
Home Screen.....	4
Create/Maintain External User (ICSA)	5
Create A User	7
Maintaining/Inactivating existing users:.....	8
Reset a Password	11
Maintain User Credentials	12
Adding/Removing Roles for a User Logon	13
Add a New ESA.....	15
Logging Out.....	16



Introduction

TC PLUS is an interactive customer activities transactional system utilizing advanced technologies to provide automated functionalities and increased flexibility to enable TC PLUS customer's access to information they need to conduct their business.

1. The External Security Administrator (ESA) is a role which allows the person(s) assigned to manage their companies TC PLUS security information for all valid users
2. All TC PLUS customers must assign this function to at least one login ID

After submitting the initial access request form, the ESA will receive a login ID and a company default password from the TransCanada Internal Security Administrator (ISA)

1. To log in, go to www.tcplus.com



TC PLUS Customer Login

Username:

Password:

Login



Logging in to TC PLUS

2. After the initial login, and every login after a password reset, the system will prompt the user to change their password:

PASSWORD CHANGE REQUEST

Please change your current password before proceeding

Old Password *

New Password *

Confirm New Password *

Password Rules:
Minimum 6 characters
Must include an Uppercase letter, a Lowercase letter and a Number
May include a special Character (i,e,!,#,%)


- a. Notice the Password Rules:
 - i. Minimum of six characters
 - ii. Uppercase/lowercase combination required
 - iii. Special characters are **optional**
 - iv. Cannot be a previous password
3. After changing the default password, users should “Continue” into TC PLUS:

jdoo2 your new password has been set.
Use this new password the next time you log into your account.

CONTINUE

Home Screen

1. The ESA will manage users under the Administrator tab menu items:

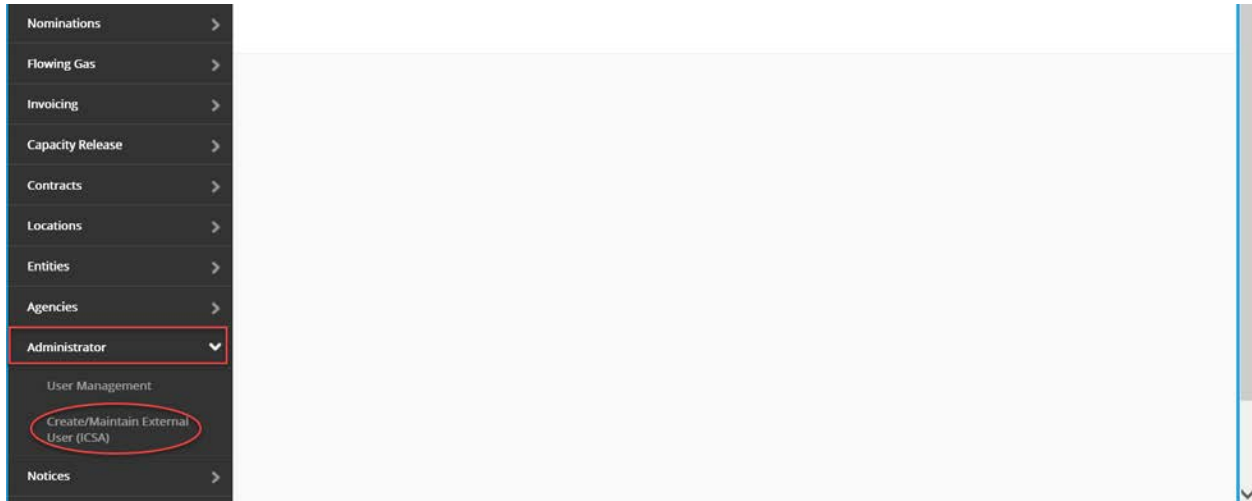

2. “Create/Maintain External User (ICSA)” is where:
 - a. Users are created
 - b. User credentials can be maintained:
 - i. User Name (Cannot be changed once user is created)
 - ii. First Name
 - iii. Last Name
 - iv. Email Address
 - v. Phone Number
 - vi. Users can be inactivated/reactivated
3. “User Management” is where:
 - a. User roles, which allow for certain access to specific parts of TC PLUS, are maintained:
 - i. Read Only—all users must be given this role, automatically enabled when any update role is assigned
 - ii. Contract Analyst
 - iii. Scheduler
 - iv. Contract Execution
 - v. Operator
 - vi. Security Admin

Create/Maintain External User (ICSA)

Create/Maintain External User (ICSA), accessible from a menu item in TC PLUS, is where new users are created and their names, email addresses, and phone numbers, are maintained. A user must first be created in ICSA (Integrated Customer Security Administration) before it can be maintained in User Management.

1. To get to TC PLUS User Administration (shown below), users will click on the menu item "Create/Maintain External User (ICSA)" (shown below):

The screenshot displays the TCPLUS User Administration interface. On the left is a dark navigation menu with a red arrow pointing to the "Create/Maintain External User (ICSA)" option. The main content area is titled "TCPLUS User Administration" with a red arrow pointing to it. Below the title, it shows "B&B Company (B&B)" and "Duns Number (223000332)". The interface is divided into two main sections: "Contacts - (1) - Active Users" and "User Details".

Contacts - (1) - Active Users

[Contacts Report](#)
[Show All Users](#) / [Show Active Users](#)

Name	Admin	Active
Doe, Jane	✓	✓

Default Enterprise Password

*Young12



User Details

*User Name Enabled
Administrator
Suggested format: first initial, last name

*First Name
*Last Name
*Email Address
*Phone Number
The max. length is 15 characters long



4. The new screen will open in a new tab with the user's entity as the "tab title"
 - a. e.g. B&B Company
5. Notice the "TC PLUS Home Page" link (circled below) that will take you back to the home screen
 - a. Users may also open menu items in a new window
 - b. Right click on the menu item and choose "Open in New Window"

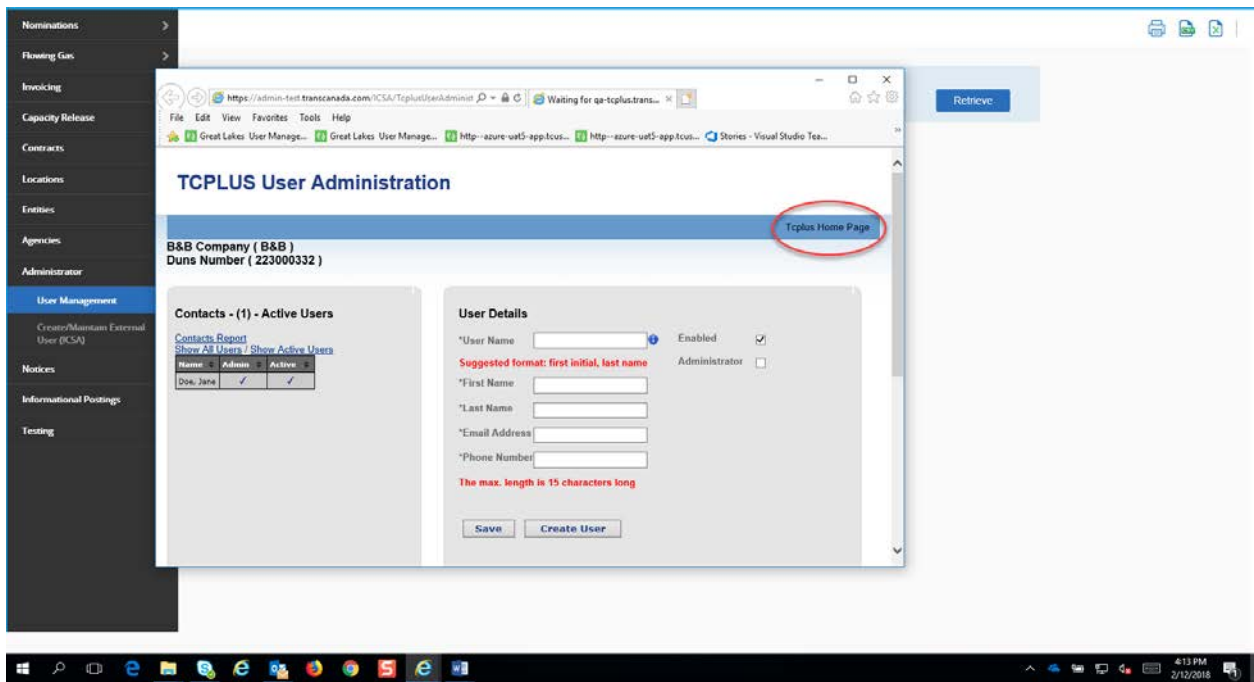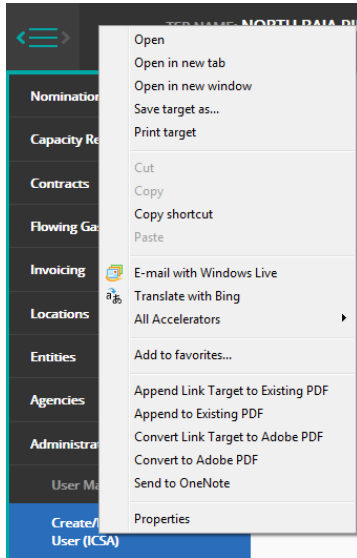

Create A User

1. To set up a new user:
 - a. Enter the required (*) information under User Details
 - b. Suggested user name format is first initial last name
 - i. e.g. abryant1(Andrews Bryant)
 - ii. User names are not case sensitive
 - iii. If a user name is already taken, an error will appear after saving
2. The phone number field will allow characters
 - a. e.g. (000)-000-000
3. Click "Save" (not Create User) and the user will appear under the Contacts listing as an Active User

Tcplus Home Page

B&B Company (B&B)
Duns Number (223000332)

'bjackson' Saved Successfully (at 12-02-2018 3:15:35 PM MT)

Contacts - (2) - All Users

[Contacts Report](#)
[Show All Users](#) / [Show Active Users](#)

Name	Admin	Active
Jackson, Bill	✓	✓
Doe, Jane	✓	✓

User Details

*User Name ? Enabled

*First Name Administrator

*Last Name

*Email Address

*Phone Number

Default Enterprise Password ?

*Bab1234


- a. The new user's information will still populate under User Details
 - i. The ESA should click "Create User" to clear the fields to create a new user
- b. To add user roles (nominations, contracts, etc.), go to TC PLUS, User Management by clicking on "User Management" under the Administrator tab
- c. All new users' passwords will default to the "Default Enterprise Password"
- d. This is also the password that is used when resetting an existing users password



- e. The ESA may change the “Default Enterprise” password at their discretion:
 - i. Enter a new password (within the password rules)
 - ii. Choose “Save” under User Details

Maintaining/Inactivating existing users:

- 1. A user’s First Name, Last Name, Email Address and Phone Number may be updated in the User Details Screen.

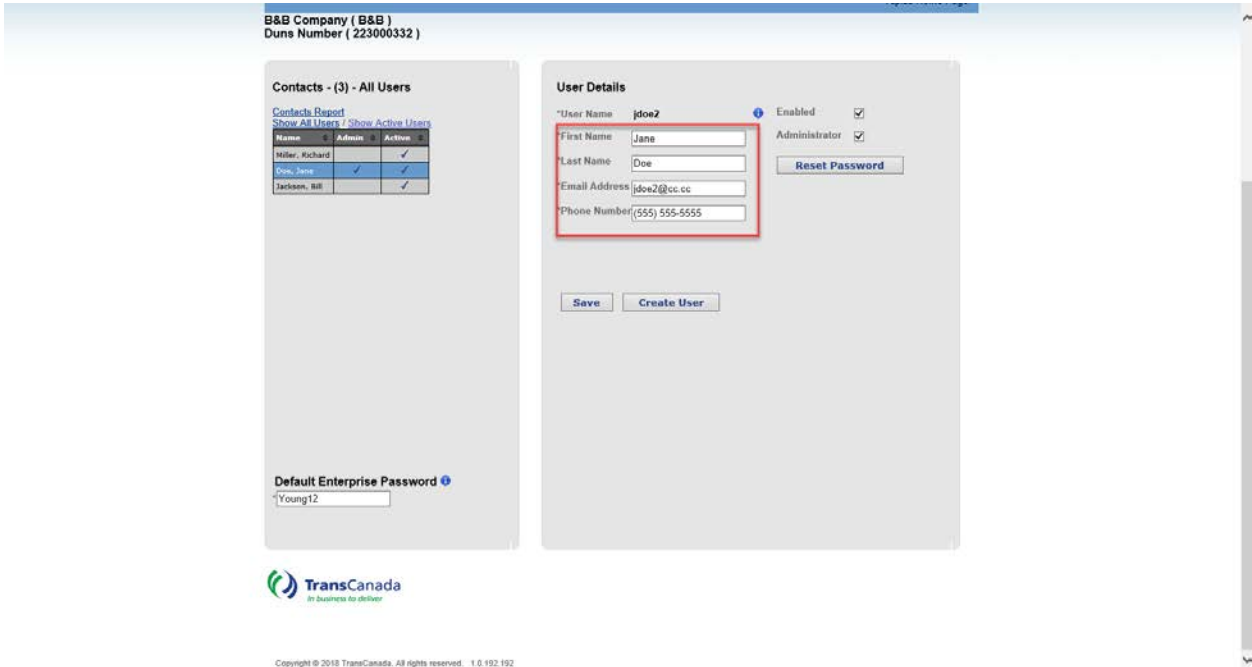

- a. Click on the user that is to be changed from Contacts – All Users
- b. The user information will populate under User Details
- c. Make any necessary user information changes and click “Save”

2. To inactivate a user, uncheck the Enabled box and click "Save"
 - a. Select Yes, in the screen box that says, "Are you sure?"
 - b. The user status will be updated to "Inactive" after the system job runs and the status change will be viewable in TC PLUS
 - i. When a user logon is made inactive, the system will automatically remove all associated role assignments

TCPLUS User Administration

Tcplus Home Page

B&B Company (B&B)
Duns Number (223000332)

Contacts - (3) - All Users

[Contacts Report](#)
[Show All Users](#) / [Show Active Users](#)

Name	Admin	Active
Hillar, Richard	✓	✓
Diaz, Jene	✓	✓
Jackson, Bill	✓	✓

Default Enterprise Password ⓘ
*Young12

User Details


*User Name: **bjackson** Enabled

*First Name: Administrator

*Last Name:

*Email Address:

*Phone Number:

 TransCanada

TCPLUS User Administration

Tcplus Home Page

B&B Company (B&B)
Duns Number (223000332)

Contacts - (3) - All Users

[Contacts Report](#)
[Show All Users](#) / [Show Active Users](#)

Name	Admin	Active
Hillar, Richard	✓	✓
Diaz, Jene	✓	✓
Jackson, Bill	✓	✓

Default Enterprise Password ⓘ
*Young12

User Details

*User Name: **bjackson** Enabled

*First Name: Administrator


*Last Name:

*Email Address:

*Phone Number:

Are you sure?

This will disable bjackson.
Do you wish to continue?

 TransCanada
In business to deliver

Copyright © 2018 TransCanada. All rights reserved. 1.0.102.102



1. To reactivate a user:
 - a. Click on the user that is to be reactivated
 - b. Recheck the Enabled box and click "Save"
 - c. The user status will be updated to "Active" after the system job runs and the status change will be viewable in TC PLUS
 - i. New roles must be associated with the reactivated user logon in TC PLUS

TCPLUS User Administration

B&B Company (B&B)
Duns Number (223000332)
*Jackson Saved Successfully (at 12-02-2018 3:27:50 PM MT)

Tcplus Home Page

Contacts - (3) - All Users

[Contacts Report](#)
[Show All Users](#) / [Show Active Users](#)

Name	Admin	Active
Jackson, Bill		
Dine, Jane	✓	✓
Miller, Richard		✓

User Details

*User Name: Enabled Administrator

*First Name:

*Last Name:

*Email Address:

*Phone Number:

Default Enterprise Password

*Young12

Reset a Password

1. To reset an existing user's password, click "Reset Password".
 - a. The Password will be changed to the "Enterprise Default Password".

The screenshot displays the user management interface for B&B Company (B&B) with Duns Number 223000332. It is divided into two main sections: 'Contacts - (3) - All Users' and 'User Details'.

Contacts - (3) - All Users

Contacts Report
Show All Users | Show Active Users

Name	Admin	Active
Miller, Richard	✓	✓
Dow, Jane	✓	✓
Jackson, Bill	✓	✓

User Details

*User Name: **rmiller1** Enabled
*First Name: Richard Administrator
*Last Name: Miller
*Email Address: rmiller@bb.cc
*Phone Number: (555) 555-5555

Reset Password
Successfully reset

Buttons: Save, Create User

Default Enterprise Password
*Young12

TransCanada
In business to deliver

Copyright © 2018 TransCanada. All rights reserved. 1.0.192.192

Maintain User Credentials

1. A user's First Name, Last Name, Email Address and Phone Number may be updated in the User Details Screen.
 - a. All edits must be saved.

The screenshot displays a web application interface for user management. At the top, it identifies the user as 'B&B Company (B&B)' with 'Duns Number (223000332)'. The main content is divided into two panels. The left panel, titled 'Contacts - (3) - All Users', includes a 'Contacts Report' section with a table of users and a 'Default Enterprise Password' field. The right panel, titled 'User Details', shows the configuration for user 'jdoe2'. A red box highlights the 'First Name', 'Last Name', 'Email Address', and 'Phone Number' fields, which contain the values 'Jane', 'Doe', 'jdoe2@cc.cc', and '(555) 555-5555' respectively. Other fields include 'Enabled' (checked), 'Administrator' (checked), and a 'Reset Password' button. 'Save' and 'Create User' buttons are located at the bottom of the 'User Details' panel. The TransCanada logo and copyright information are visible at the bottom of the page.

Name	Admin	Active
Miller, Richard		✓
Doe, Jane	✓	✓
Jackson, Bill		✓

User Details

*User Name: **jdoe2** Enabled:
Administrator:
Reset Password

First Name: Jane
Last Name: Doe
Email Address: jdoe2@cc.cc
Phone Number: (555) 555-5555

Save Create User

Default Enterprise Password
*Young12


TransCanada
In business to deliver

Copyright © 2018 TransCanada. All rights reserved. 1.0.192.192


Adding/Removing Roles for a User Logon

Once a new user is created or the associated credentials are modified on an existing user, after 15 minutes (and the system job runs), the new user or any changes will appear in the TC PLUS User Management Screen.

The External Security Administrator must log into TC PLUS to add roles to a new logon user in the Administrator/User Management Screen. **Note: A user will not be able to successfully log into TC PLUS until user roles are associated to their user logon.**

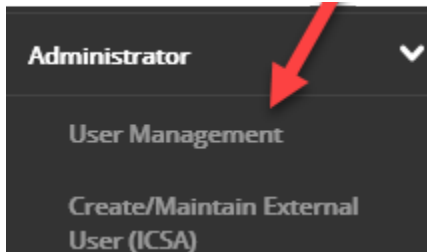

1. Click on the menu item "User Management"
2. From the User Management screen, ESA's will see all users for their entity
3. Users are searchable by:
 - a. Last Name
 - b. First Name
 - c. User Name
 - d. Roles
 - e. Status

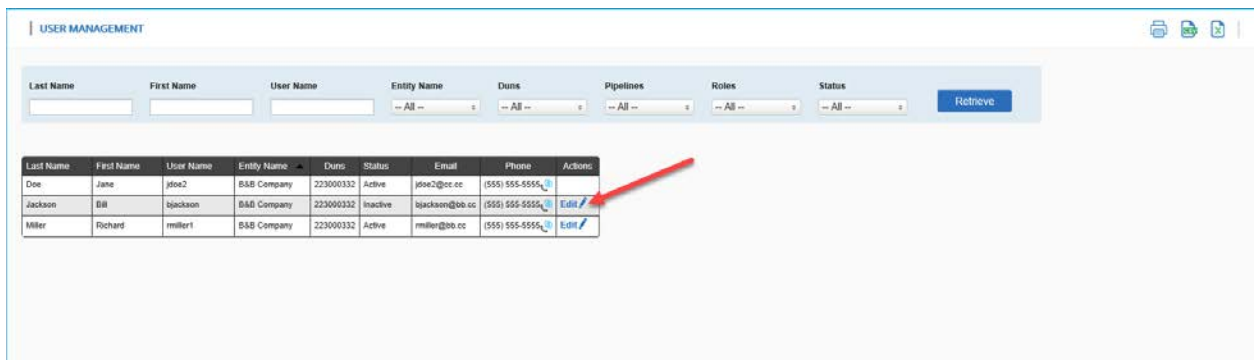A screenshot of the 'USER MANAGEMENT' interface. It features a search bar with fields for Last Name, First Name, User Name, Entity Name, Duns, Pipelines, Roles, and Status, followed by a 'Retrieve' button. Below the search bar is a table with columns: Last Name, First Name, User Name, Entity Name, Duns, Status, Email, Phone, and Actions. The table contains three rows of user data. A red arrow points to the 'Edit' link in the Actions column for the user 'Jackson'.

Last Name	First Name	User Name	Entity Name	Duns	Status	Email	Phone	Actions
Doe	Jane	jdoe2	B&B Company	223000332	Active	jdoe2@cc.cc	(555) 555-5556	Edit
Jackson	Bill	bjackson	B&B Company	223000332	Inactive	bjackson@bb.cc	(555) 555-5556	Edit
Miller	Richard	rmiller1	B&B Company	223000332	Active	rmiller@bb.cc	(555) 555-5556	Edit

- f. Remember that users are not created here, but are created in ICSA
4. To edit a user's roles, choose "Edit" under the "Actions" column
 5. External users may have the following roles:
 - a. Read only – all users must be given this role, will default when given any other update role first



- b. Contract Analyst
- c. Scheduler
- d. Contract Execution
- e. Operator
- f. Security Admin

Return to View Users | EDIT USER Reset Cancel Submit

Last Name	First Name	User Name	Entity Name	Duns	Phone Number	Email	Status
Jackson	Bill	bjackson	B&B Company	223000332	(555) 555-5555	bjackson@bb.cc	Active

User Roles	North Baja	GTN	Great Lakes	Tuscarora
External Contract Analyst	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External Contract Execution	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External Operator	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External ReadOnly	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External Scheduler	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External Security Admin	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

- 6. Only pipelines that the entity is associated with are enabled for changes
 - a. e.g. North Baja, GTN and Tuscarora are greyed out, thus indicating that this users' entity does not have access to these pipelines
- 7. To make changes:
 - a. Check the appropriate boxes next to the roles that are to be added
 - i. e.g. Bill Jackson is being given only "Read Only", "Contract Analyst" and "Contract Execution" roles
- 8. Click the "Submit" button

Return to View Users | EDIT USER Reset Cancel Submit

Last Name	First Name	User Name	Entity Name	Duns	Phone Number	Email	Status
Jackson	Bill	bjackson	B&B Company	223000332	(555) 555-5555	bjackson@bb.cc	Active

User Roles	North Baja	GTN	Great Lakes	Tuscarora
External Contract Analyst	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
External Contract Execution	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
External Operator	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External ReadOnly	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
External Scheduler	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External Security Admin	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

- 9. After changes are submitted successfully, the screen displays a success message and will default back to the View User.

✓ USER BJACKSON SUCCESSFULLY UPDATED. ✕

Last Name	First Name	User Name	Entity Name	Duns	Phone Number	Email	Status
Jackson	Bill	bjackson	B&B Company	223000332	(555) 555-5555	bjackson@bb.cc	Active

User Roles	North Baja	GTN	Great Lakes	Tuscarora
External Contract Analyst	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
External Contract Execution	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
External Operator	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External ReadOnly	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
External Scheduler	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External Security Admin	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Add a New ESA

1. ESA's cannot edit their own information
2. To add an ESA:
 - a. Changes must be made in both User Management and ICSEA
 - b. The current ESA will need to first follow the instructions in ICSEA
 - c. Select the Administrator button in ICSEA
 - d. "Edit" the new ESA user in TC PLUS
 - e. Choose "Security Admin" as a user role and click "Submit"
 - f. Entities may have an unlimited amount of ESA's

B&B Company (B&B)
Duns Number (223000332)

Contacts - (3) - All Users

Contacts Report
Show All Users / Show Active Users

Name	Admin	Action
Miller, Richard		✓
Dow, Jane	✓	✓
Jackson, Bill		✓

Default Enterprise Password ⓘ
*Young12

User Details


*User Name: Enabled

*First Name: Administrator

*Last Name: Reset Password

*Email Address:

*Phone Number:

 **TransCanada**
In business to deliver

Copyright © 2018 TransCanada. All rights reserved. 1.0.192.192



Logging Out

1. To log out:
 - a. Click on the arrow next to your name and company and select "Logout"

